


## HORIZONTAL SOFA PACKAGING

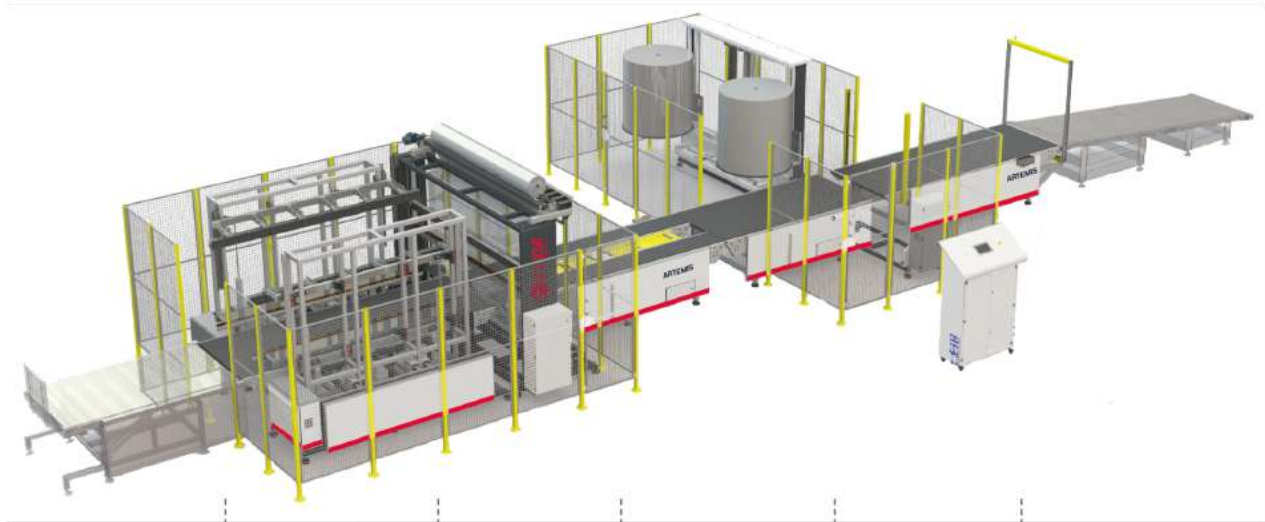

**SIDE CUTTING STATION**  
Two open side areas of nylon on the sofa is being closed (melted and sealed)

**STATION OF HORIZONTAL CUTTING**  
Wrapping the protective nylon on the sofa.

**STATION OF PROTECTIVE MATERIAL**  
Placing the protective material around the sofa by using a lifter device.

**VERTICAL CUTTING STATION**  
Wrapping by air bubble film around the sofa.

**MEASURING STATION**  
Obtaining of measurement information is sofa width.



Ask for details

# ARTEMIS

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.



Ask for details




## NYLON FEATURES

Max. Film Width	mm/inch	2800	110 <sup>15</sup> / <sub>16</sub> "
Max. Film Reel Diameter	mm/inch	300	11 <sup>13</sup> / <sub>16</sub> "
Reel Core Diameter	mm/inch	76	2 <sup>13</sup> / <sub>16</sub> "
Suitable Film Materials		Low thickness polyethylene	
Cutting System Operating Temperature	°C	50 - 150	

## AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	1200	110 <sup>15</sup> / <sub>16</sub> "
Max. Film Reel Diameter	mm/inch	1200	11 <sup>13</sup> / <sub>16</sub> "
Reel Core Diameter	mm/inch	76	2 <sup>13</sup> / <sub>16</sub> "
Suitable Film Materials		PE Film, PE Air Bubble Film, PE Foam Film, PVC Film	
Cutting System Operating Temperature	°C	50 - 150	

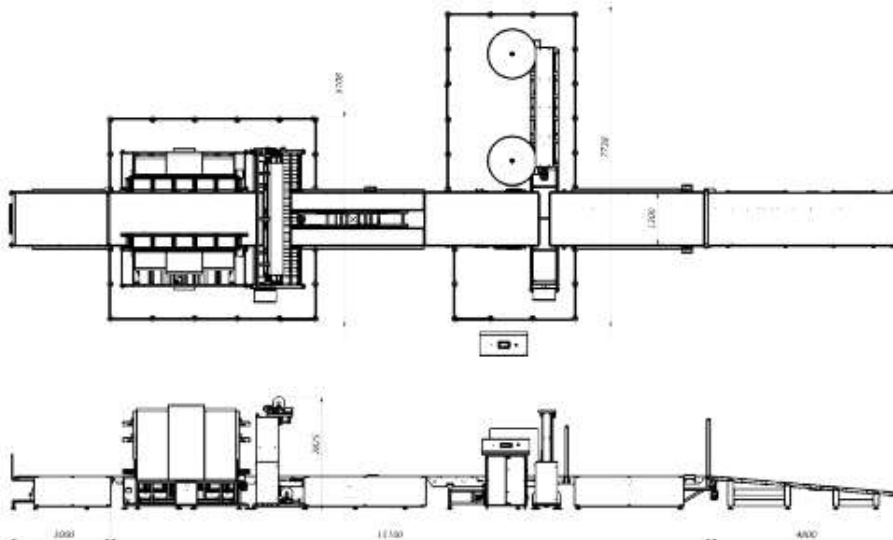

HORIZONTAL SOFA PACKAGING

## TECHNICAL FEATURES

### PRODUCT TO TAPE DIMENSIONS

Max. Length		Unlimited	
Min. Dimensions (W x H x L)	mm/inch	1300 x 1200 x 3000	51 <sup>3</sup> / <sub>16</sub> " x 47 <sup>1</sup> / <sub>4</sub> " x 118 <sup>7</sup> / <sub>16</sub> " * With Short Part Nail.

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	3950	155 <sup>23</sup> / <sub>16</sub> "
Total Length	mm/inch	4000	157 <sup>21</sup> / <sub>16</sub> "
Working Height	mm/inch	850	33 <sup>13</sup> / <sub>32</sub> "
Electric Motor Power	kW	0,75	
Max. Conveyor Speed	meter/min	12	
Max. Load Capacity	kgs	200	

### MACHINE GENERAL FEATURES

Main Motor Power	kW	18,5
*Electric Supply	Volt - Hz	380 Volt -50/60 Hz - 3P+1N+1G
Total Weight	kg	6750 / 1125 [Optional]

\* 208 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)