


OLYMPIA 150 s BN

BEDROOM FURNITURE - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS
DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND
PIPES PVC PROFILE PRODUCTS ETC.

Ask for details

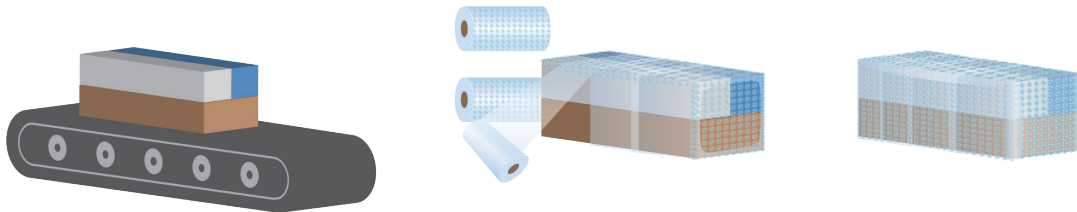

TOTAL CLOSING SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Min. Dimensions (W x H x L)	mm/inch	200 x 18 x 700*	$7\frac{7}{8}'' \times 4\frac{5}{16}'' \times 27\frac{9}{16}''$	* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	$75\frac{3}{4}''$
Total Length	mm/inch	2000	$78\frac{47}{64}''$
Working Height	mm/inch	920	$35\frac{7}{16}''$
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	10	
Max. Load Capacity	kgs/meter	100	

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	1350	$53\frac{5}{32}''$
Max. Film Reel Diameter	mm/inch	Ø600	$23\frac{5}{8}''$
Reel Core Diameter	mm/inch	Ø20 - Ø76	$2\frac{5}{32}'' \sim 2\frac{63}{64}''$
Cutting & Welding System	°C	50 - 150	
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

STRETCH FILM FEATURES

Max. Width	mm/inch	250	$9\frac{27}{32}''$	
Max. Diameter	mm/inch	Ø 230	$9\frac{1}{16}''$	(Max. Weight: 4,5 kg)
Reel Core Diameter	mm/inch	Ø 76	$2\frac{63}{64}''$	
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	2,2	
Max. Ring Rotation Speed	rpm	60	
Min. Ring Rotation Speed	rpm	15	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	5,2	
Standard Machine Dimensions (W x H x L)	mm/inch	2395 x 2200 x 6675	$94\frac{19}{64}'' \times 86\frac{39}{64}'' \times 262\frac{51}{64}''$
Total Weight	kg	1850	

* 208 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)