
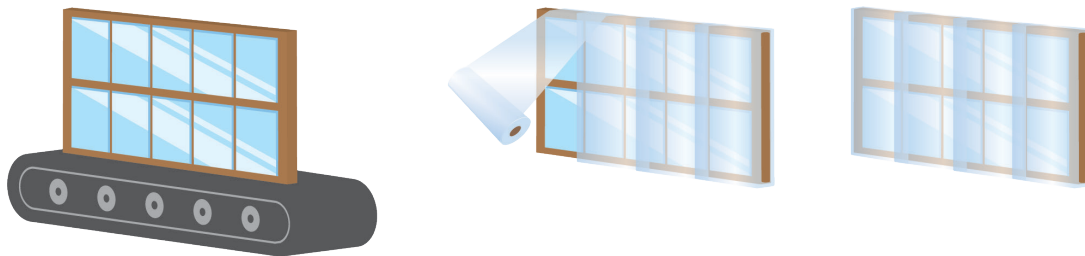


FRAMEWRAP 1800 S

ALUMINIUM, STEEL, PVC PANELS AND FRAMES - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - DOORS

Ask for details

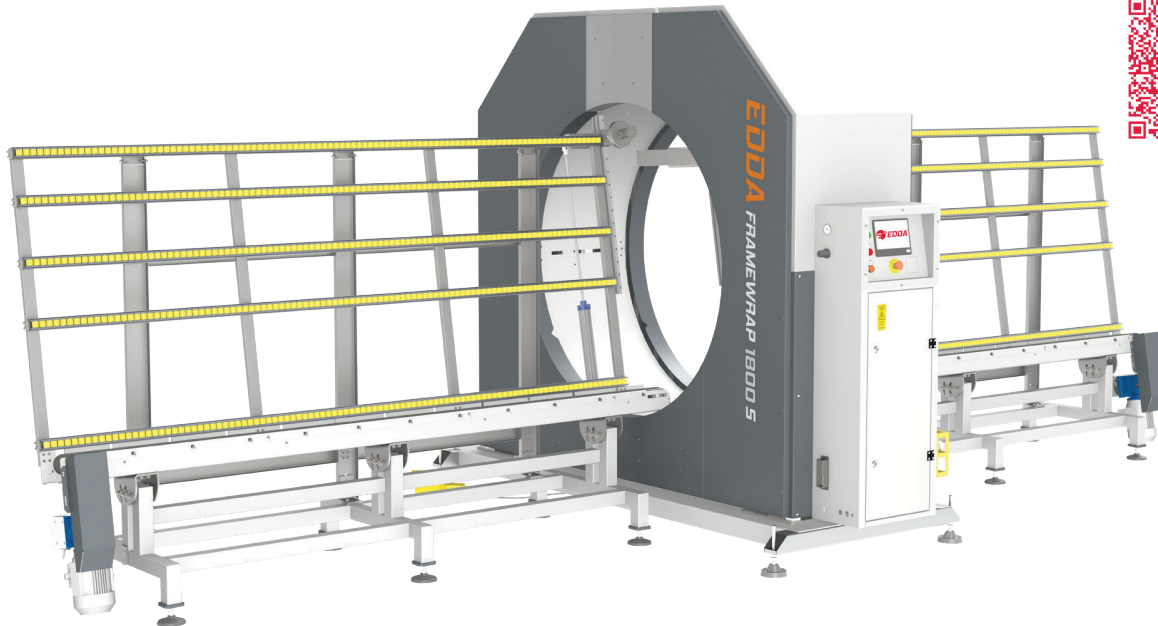

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Max. Width x Max. Height	mm/inch	150 x 1550	$5^{29}/_{32}$ '' x $61^{1}/_{32}$ ''	* With Short Part Nail
Min. Dimensions (W x H x L)	mm/inch	40 x 750 x 750*	$1^{37}/_{64}$ '' x $19^{11}/_{16}$ '' x $29^{17}/_{32}$ ''	

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2950	$116^{9}/_{32}$ ''
Total Length	mm/inch	2975	$117^{1}/_{32}$ ''
Working Height	mm/inch	620	$24^{13}/_{32}$ ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

STRETCH FILM FEATURES

Max. Width	mm/inch	250	$9^{27}/_{32}$ ''	(Max. Weight: 4,5 kg)
Max. Diameter	mm/inch	Ø 230	$9^{1}/_{16}$ ''	
Reel Core Diameter	mm/inch	Ø 76	$2^{63}/_{64}$ ''	
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	3	
Max. Ring Rotation Speed	rpm	50	
Min. Ring Rotation Speed	rpm	10	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	4,5	
Standard Machine Dimensions (W x H x L)	mm/inch	3050 x 2670 x 6350	$120^{5}/_{64}$ '' x $105^{7}/_{8}$ '' x 250''
Total Weight	kg	1900	

* 208 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

HORIZONTAL STRETCH FILM WRAPPING SERIES