


FRAMEWRAP 2500 S

ALUMINIUM, STEEL, PVC PANELS AND FRAMES - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - DOORS

Ask for details

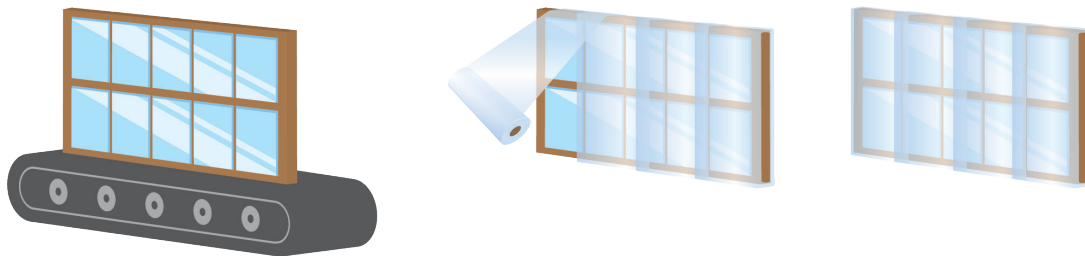

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Max. Width x Max. Height	mm/inch	150 x 2235	$5\frac{29}{32}$ / $80\frac{45}{64}$ / 88	* With Short Part Nail
Min. Dimensions (W x H x L)	mm/inch	40 x 890 x 1250*	$1\frac{37}{64}$ / $35\frac{3}{64}$ / $49\frac{7}{32}$	

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2950	$116\frac{9}{64}$ / $117\frac{4}{8}$ / $24\frac{13}{32}$
Total Length	mm/inch	2975	
Working Height	mm/inch	650	
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kg/meter	100	

STRETCH FILM FEATURES

Max. Width	mm/inch	500	$19\frac{11}{16}$ / $9\frac{27}{32}$ / $2\frac{43}{64}$	(Max. Weight: 9 kg)
Max. Diameter	mm/inch	Ø 250		
Reel Core Diameter	mm/inch	Ø 76		
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	5	
Max. Ring Rotation Speed	rpm	35	
Min. Ring Rotation Speed	rpm	10	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	6,2	
Standard Machine Dimensions (W x H x L)	mm/inch	3700 x 3350 x 6750	$145\frac{43}{64}$ / $131\frac{57}{64}$ / $265\frac{3}{4}$
Total Weight	kg	2500	

* 208 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

HORIZONTAL STRETCH FILM WRAPPING SERIES